



**RTX8200**  
BLUETOOTH BEACON


The Bluetooth beacon is used for indoor localization in large building like hospitals, malls, offices or airport terminals. The beacon is placed in the different rooms, or doorways and when a terminal, with BTLE support, detects the beacon it will report the id information to a central sever via the terminals DECT connection. The central server will use this information, based on a deployment plan of the beacons, to detect the terminal location.

### Mode 1:

Beacon advertises (transmit mode), which a passing phone e.g. RTX8631 will detect and report to the alarm server.

### Mode 2:

Beacon scan for BTLE devices (receiver mode) of passing equipment and will pass the detections to the alarm server.

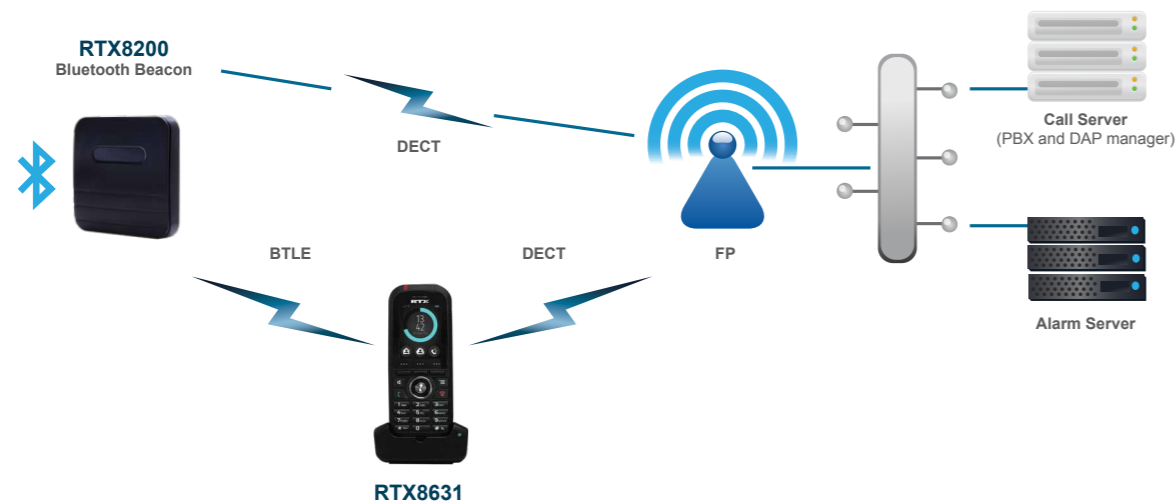

## FEATURES

- Low-power Bluetooth SoC for long-term battery operation
- 2 x AA batteries
- Power by USB or 5-24V DC
- 4-antenna array for Bluetooth beamforming
- 6 Bluetooth RF power steps for controlling range (2-15 meter)
- Bluetooth Low Energy 4.1
- Optionally 2xSMA for external antenna loops (with individual IDs)
- Optionally fitted with DECT modem for maintenance and monitoring
- Key for configuration enable

## BLUETOOTH TAG FEATURES

- Buzzer
- LED
- Button
- BT LE
- CR2016 3V lithium

## TECHNICAL SPECIFICATIONS

### BLUETOOTH

- Bluetooth Low Energy 4.1
- Profiles GAP / GATT
- Beacon Advertisement mode
  - iBeacon (Apple)
  - AltBeacon (Radius)
  - Eddystone (Google)

### CONFIGURATION / DEPLOYMENT

- Configuration via
  - Handset
  - Base provisioning
- Deployment survey tool in DECT handset

### SIZE AND WEIGHT

- Size: 112 x 112 x 23mm
- Weight: 155 g

### POWER SUPPLY OPTION

- 5-24V DC connection
- USB power connection
- 2 x AA Alkaline
- POE IEEE 802.3af compliant

### DECT

- Frequency bands:
  - 1880 - 1900MHz (EU)
  - 1910 - 1930MHz (LATAM)
  - 1910 - 1920MHz (Brazil)
  - 1920 - 1930MHz (US)
- Range:
  - Indoor: 50m
  - Outdoor: 300m

### ENVIRONMENTAL CONDITIONS

- ESD 8KV Contact and 12KV Air
- Operating conditions: 0 - 45 degrees

### RELIABILITY SPEC

- Drop height: 1.0 m on hardwood floor

### APPROVALS

- EU, US, CA and AUS

### BOX CONTENT

- 1 RTX8200 Beacon
- 2 batteries
- 1 Safety sheet